



1810

TELEPHONE ENTRY SYSTEM

THE BUILT-IN DIRECTORY MAKES THE 1810 SUITABLE FOR A WIDE VARIETY OF APPLICATIONS AND IS EASILY UPDATED WITH A WORD PROCESSING PROGRAM



flush mount

surface mount

- Provides both resident and visitor access control in residential or commercial applications
- Visitors use the 1810 to communicate with a resident, who can then grant or deny them access from their touch-tone phone
- Built-in directory provides service for up to 1000 residents
- Programmable directory codes can be set from 1 to 4 digits
- 2 year limited factory warranty



built-in display
indicates door/gate has been opened



dtmf tone output
useable with PBX, KSU and telephone systems with auto-attendants




led lighted
directory display



modular design
makes installation and service easy

1810 TELEPHONE ENTRY SYSTEM

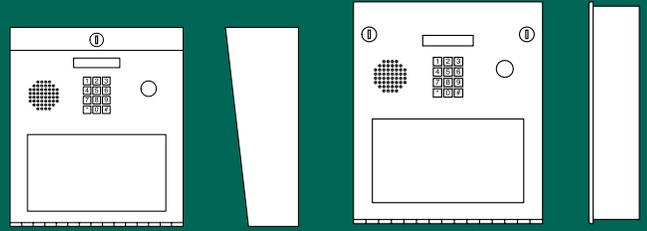

1810 Surface

11.25" W x 13" H x 4.75" D
(285mm W x 330mm H x 120.6mm)

1810 Flush

12" W x 13.25" H x 3.25" D
(305mm W x 336.5mm H x 82.5mm D)

1810	PHONE # MEMORY	ENTRY CODES	DEVICE CODES	RELAYS	DIRECTORY	ELEVATOR CONTROL	PROGRAMMING OPTIONS	OPTIONS	TRANSACTION BUFFER
Surface Mount	1000	1000 (4-digit) 6 (5-digit)	N/A	2	Paper	-	System Keypad or Touch-Tone Telephone	Handset Kit	-
Flush Mount	1000	1000 (4-digit) 6 (5-digit)	N/A	2	Paper	-	System Keypad or Touch-Tone Telephone	Gold Plated Faceplate	-

Technical Features

Mechanical

- Stainless steel faceplate
- Galvanized steel sub-plate
- Metal keypad
- Offset speaker holes for protection
- Hands free voice operation (Optional handset available on surface mount style only)
- Built-in postal lock provision
- Surface or Flush mounting styles
- Flush mount requires flush mounting kit
- Enclosures are rated NEMA 4X

Electrical

- 16 VAC (power transformer included)
- Full Duplex voice communication
- Stores up to 1000 phone numbers, 15 area codes
- Programmable directory codes (1 to 4 digits)
- 10 & 11 digit dialing capability
- DTMF tone output allows for use withKSU, PBX and auto-attendant type phone systems
- Four-digit entry codes = 1000
- Five-digit entry codes = 6
- Built-in clock
- Time clock has its own backup power source
- Entry code time zones
- Hold open time zones (4)
- Flash entry codes
- Time zone restrictions on selected entry codes
- Two relays to control two entry points
- Two special inputs can be programmed for relay activation or dial-out function
- LCD display for programming assistance and shows 'open' when access is granted

Miscellaneous

- Environmental: 10°F to 145°F (-12°C to 62°C)
- ADA Compliant handset kit (P/N 1807-012) available on surface mount only
- Camera Ready: Optional CCTV camera*
*may require additional CCTV equipment
- Shipping weight approximately 20-25 Lbs (9-11.3 kg)



FCC (US) DUF6VT-12874-0T-0
DOC (CAN) 1736 4507 A



Access Control Solutions since 1948

Distributed by:

MEMBER:



DOORING, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A.
Tel: 310-645-0023 FAX: 310-641-1586 www.dooring.com
© 2012 All Rights Reserved. Product specifications may change without notice.
Rev. 9/12