


VIKING ACCESS SYSTEMS™

HIGH TRAFFIC BARRIER GATE SOLUTION

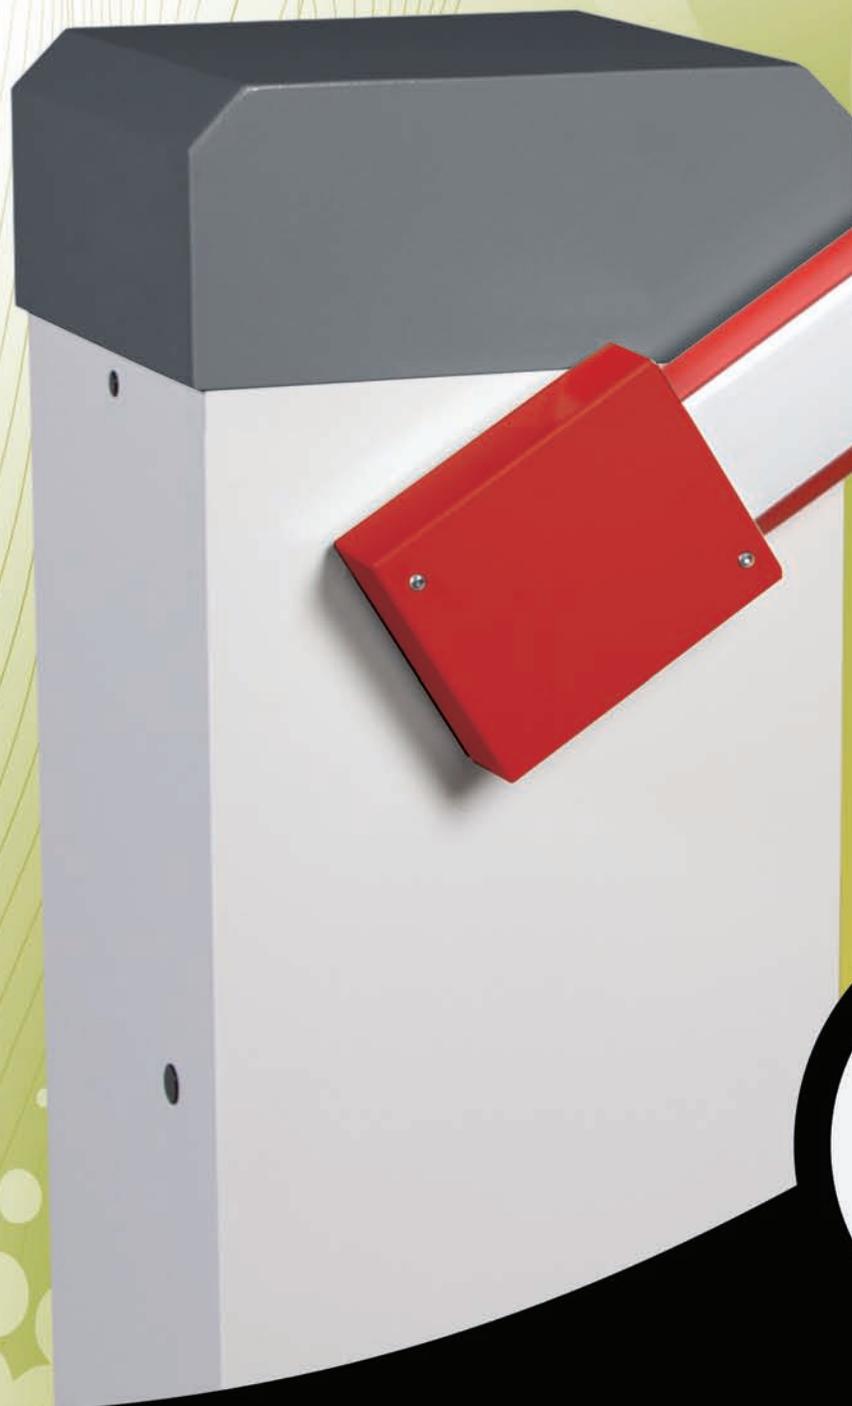

B-12

COMMERCIAL

BARRIER GATE OPERATOR

CLASS II, CLASS III, AND CLASS IV VEHICULAR GATE OPERATOR



VIKING BLUE ENABLED



SOLAR EFFICIENT OPERATION

B-12™ PRODUCT INFORMATION AND SPECIFICATIONS

The Viking B-12™ barrier gate operator offers operational features such as; an integrated backup system, DC operation, flexibility of installation, and surge protection. This operator is capable of handling arms up to 16 feet long with speeds from 2 to 3 seconds. The spacious chassis allows easy installation and service access.

The Viking B-12™ is Raising the Bar in Barrier Gate Operation.

Available with 12' or 16' aluminum arm
or 14' wooden arm

Capable of synchronization with
gate operators for access control

Optional illumination kit
available for arm assembly

Easy access to
control board and electronics

Simple limit switch adjustment and
positive stop to assure 100% reliability



VIKINGBLUE
Enabled for wireless
communication and
diagnostics



Plug-in loop rack included



keyed release



High efficiency
gearhead motor
cycles arms up to
16' in 2 seconds
in high traffic
applications

Powder coated galvanized
steel cabinet with plenty off
room for accessories



VIKING BLUE ENABLED



SOLAR EFFICIENT OPERATION



800.908.0884
vikingaccess.com

| | |
|--------------------------|---|
| Operational Voltage | ... 24 VDC with 2 H.P. Motor |
| Main Power Source | ... 120 / 220 VAC Single Phase |
| Battery | ... 7 AmpHr 12 VDC x 2 |
| Max Barrier Arm Length | ... Wooden: 14 feet - Aluminum: 16 feet |
| Max Operating Speed | ... 2 to 3 seconds per opening |
| Battery Backup Operation | ... 400 + Cycles of operation |
| Operating Temperature | ... - 4° F to + 158° F |

2 YEAR COMMERCIAL WARRANTY